




MODEL CN-08-2
DIGITAL INDICATOR - TOTALIZER
SOLID STATE CONSTRUCTION



TYPICAL
DIGITAL INDICATOR-TOTALIZER

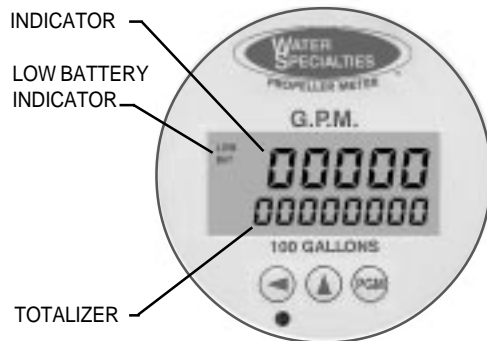

DESCRIPTION

MODEL CN-08-2 INDICATOR-TOTALIZERS provide a flow rate indication and totalization of flow volume when mounted on our electronic propeller meters. The unit features a digital indicator-totalizer and solid state construction.

INSTALLATION is normally made at the factory when the meter is assembled, but installation may be made in the field on a propeller meter by removing all the moving parts in the gear box and replacing it with a kit consisting of a probe and cable to connect into the new CN-08-2 that attaches on top of the meter head. The unit is furnished complete with all screws and O-rings necessary for installation. A kit of optional adapters and up to 100 feet of cable is available to locate a CN-08-2 at a remote locations.

CONSTRUCTION of the digital indicator-totalizer features an O-ring sealed housing conforming to NEMA 4X standards which has a padlock hasp. The unit uses the latest solid state components, and is completely encapsulated to protect it from moisture. It is electronically driven by a sensor output directly from, and is proportional to, the rotation of the propeller.

DIGITAL INDICATOR-TOTALIZER has a non-volatile EEPROM memory to store totalizer count (updated every 60 minutes while running). The indicator dial can be furnished in GPM, CFS, MGD or any standard liquid measuring units with a choice of totalizer measuring units. The display is programmable to update from 0.5 to 5 seconds, and timeout from 1 to 9999 seconds.

INDICATOR (rate) FUNCTION is a five digit indicator with .35" tall numbers, programmable with 0 to 4 decimal point place with 0.0001 to 9999 rate scaling factor. The calculation method is $1/\tau$; programmable smoothing of 0 to 99%; rate zero time of 8 seconds.

TOTALIZER FUNCTION is an eight digit totalizer with .20" tall numbers, programmable with 0 to 4 decimal places, and a total scaling factor of 0.0001 to 9999. The totalizer can be reset from the front panel or disabled permanently.

SPECIFICATIONS

ACCURACY	Rate: $\pm 0.25\%$ of reading.
TEMPERATURE RANGE	Operation: 32° to 160° F. Storage: -40° to 160° F. Consult factory for special construction for other temperatures.
INPUT SIGNAL	Type - Voltage pulse. Voltage Range - 1 to 10V (with hysteresis). Minimum Frequency - 0.125Hz. Maximum Frequency - 3KHz. Minimum Pulse Width - 2 μ s.
EMI/EMC	Electrostatic Discharge - 8KV (IEC 1000-4-2 Level 3). Electrical Fast Transient - 1KV (IEC 1000-4-4 Level 3). RF Susceptibility - 150 KHz to 230 MHz @ 10V (IEC 1000-4-6 Level 3).
POWER SUPPLY	Battery Type - 3VDC Lithium, Replaceable. Operating Life - 4 years (when used with the display timeout feature). Low Battery Indication - 6 months before expiration.
OPTIONAL EQUIPMENT	Mounting brackets, with up to 100 feet of cable for remote installation. Also optional are scaled output (Model TR-29-2) or optional 4-20mA output (Model TR-28-2).
SHIPPING WEIGHT	2 pounds.
ORDERING INFO	Must be specified by the customer and includes: Serial number of meter unit is to be mounted on. Indicator scale and units. Totalizer dial units.



3255 WEST STETSON AVENUE
HEMET, CALIFORNIA 92545-7799 USA

TEL: 909-652-6811

FAX: 909-652-3078

Visit our Website: www.mccrometer.com

E-Mail: info@mccrometer.com

Copyright © 2001 McCrometer. All written material should not be changed or altered without permission of McCrometer. The published technical data and instructions are subject to change **without notice**. Contact your McCrometer representative for current technical data and instructions.